

AC-DC 12W

6A-126WU12


Level VI CoC Tier 2

WALL-MOUNT
(Fixed type)

Features:

- IEC/EN/UL/CUL 62368
- Universal AC Input 90~264Vac
- Regulated Output With Low Ripple Noise
- 100% burn in test
- 1 year warranty
- CEC,DoE Level VI
- WEEE / ROHS 2.0 / REACH 2.0
- Safety : UL/CUL,FCC

Dimension:

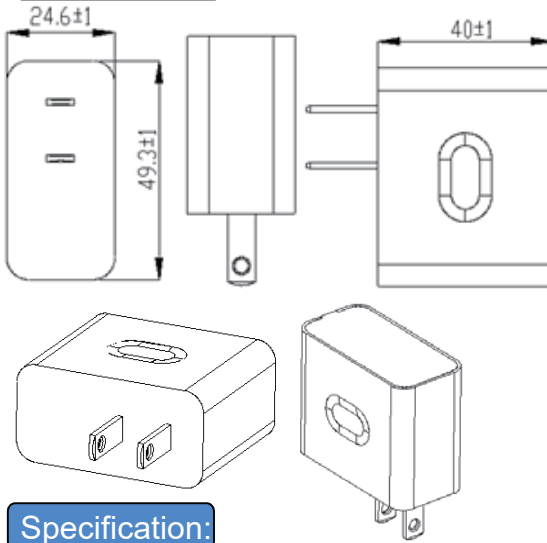

Model No.	O/P Voltage	O/P Current	O/P Watts
6A-126WU12	12V	1.0A	12.0W

Specification:

Input	Voltage	AC 90V~264V Universal Full Range
	Frequency	47-63Hz
	Current	600mA
	Leakage Current	< 0.25mA
Others Protection	Start up time	< 3000mS @115VAC Full Load
	Rise time	<20mS
	Protection	OCP/OVP/SCP
	Cooling	Natural Convection Cooling
Environment	Temperature	Operating: 0~40°C;Storage: -10~+70°C
	Humidity	Operating: 20%~85%;Storage: 10%~95%(Non Condensing)
M.T.B.F	50K Hours MIL-HDBK-217F @115VAC/ 230VAC Full Load Ambient : 25°C	
Safety Regulation	UL 62368-1, CSA C22.2 No.62368-1, IEC62368-1, EN62368-1	
EMC	EMI	FCC CFR 47 PART 15B, EN55032, EN61000-3
	Energy Efficiency	
	Average active efficiency	> 82.96% Min @ 115Vac / 60Hz input
	No-load power consumption	≤ 0.1W Min @ 115Vac / 60Hz input

製品に関するお問合せや見積り依頼は

トキトレーディング株式会社

☎079-560-7333

✉ info@tokitrading.co.jp

〒669-1342 兵庫県三田市四ツ辻710
www.tokitrading.co.jp

