


# AC-DC 150W

## 6A-1F2DB12




DESKTOP  
(AC Inlet C14)

Features:

- IEC/EN/UL/CUL 62368 & IEC/EN 60335-1& 61558-1,61558-2-16, 60601
- Universal AC Input 90~264Vac
- Regulated Output With Low Ripple Noise
- 100% burn in test
- 1 year warranty
- CEC,DoE Level VI,ErP Stage 2,CoC Tier 2,GEMS
- WEEE / ROHS 2.0 / REACH 2.0
- Safety : UL/CUL,CB,CE,FCC

Dimension:

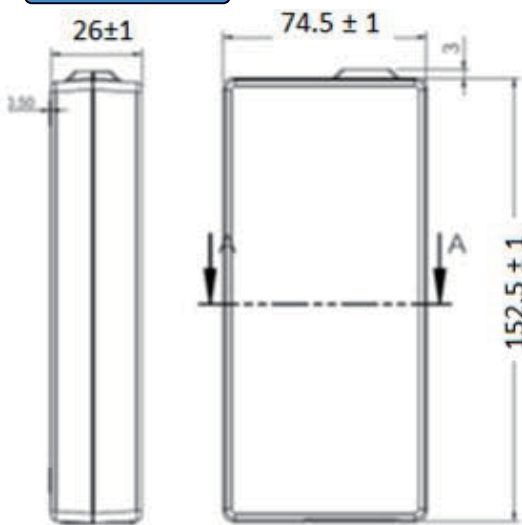

Model No.	O/P Voltage	O/P Current	O/P Watts
6A-1F2DB12	12V	12.5A	150.0W

Specification:

Input	Voltage	AC 90V~264V Universal Full Range
	Frequency	47-63Hz
	Current	2.0A
	Leakage Current	< 3.5mA
Others Protection	Start up time	< 3000ms @115VAC Full Load
	Rise time	<20ms
	Hold up time	>20ms @ 230Vac/50Hz input
	Protection	OCP/OVP/SCP
	Cooling	Natural Convection Cooling
Environment	Temperature	Operating: 0~40°C;Storage: -10~+70°C
	Humidity	Operating: 20%~85%;Storage: 10%~95%(Non Condensing)
M.T.B.F	50k Hours MIL-HDBK-217F @115VAC/ 230VAC Full Load Ambient : 25°C	
Safety Regulation	UL/CUL/EN/IEC62368, UL/CUL/EN/IEC60601, UL/CUL1310, EN/IEC60335, EN/IEC61558, PSE省令一	
EMC Standards	(under 6db): EN55032; EN55035; EN55014-1,2; EN60601-1,2	
Efficiency	(Margin 2%), DoE Level VI, Energy Star, ErP Stage 2, CoC Tier 2, NRCAN & GEMS Level VI Certified	

製品に関するお問合せや見積り依頼は

トキトレーディング株式会社

☎079-560-7333 ✉ info@tokitrading.co.jp

〒669-1342 兵庫県三田市四ツ辻710  
www.tokitrading.co.jp

