

# AC-DC 40W



## 6A-407WPXX

WALL-MOUNT  
(Interchangeable)

### Features:

- IEC/EN/UL/CUL 60601
- Universal AC Input 90~264Vac
- Regulated Output With Low Ripple Noise
- 100% burn in test
- 1 year warranty
- WEEE / ROHS 2.0 / REACH 2.0
- Safety : UL/CUL,CB,CE,FCC

### Dimension:

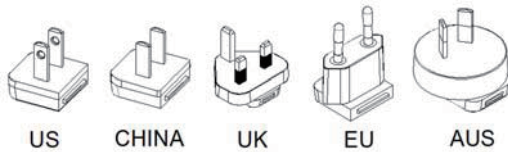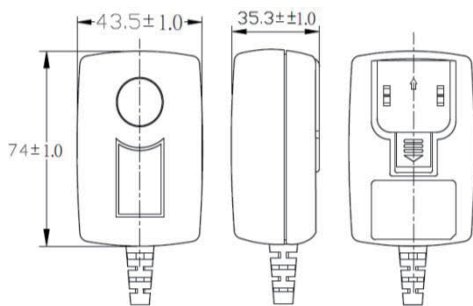

Model No.	O/P Voltage	O/P Current	O/P Watts
6A-407WPXX	5.0V - 48.0V	Max 6.0A	Max 40.0W

### Specification:

Input	Voltage	AC 90V~264V Universal Full Range
	Frequency	47-63Hz
	Current	1.0A
	Leakage Current	< 0.1mA
Others Protection	Start up time	< 3000mS @115VAC Full Load
	Rise time	<100mS
	Hold up time	>15mS @ 230VAC/50Hz input
	Protection	OCP/OVP/SCP
	Cooling	Natural Convection Cooling
Environment	Temperature	Operating: 0~40°C;Storage: -10~+70°C
	Humidity	Operating: 20%~85%;Storage: 10%~95%(Non Condensing)
M.T.B.F	50K Hours MIL-HDBK-217F @115VAC/ 230VAC Full Load Ambient : 25°C	
Safety Regulation	ANSI/AAMI ES60601-1 , CAN/CSA-C22.2 No. 60601-1, IEC60601-1 , EN6060-1	
EMC	EMI	FCC CFR 47 PART 15B , EN55011 , EN61000-3
	EMS	EN55011(EN61204-3) , EN61000-4

製品に関するお問合せや見積り依頼は

☎ **079-560-7333** ✉ [info@tokitrading.co.jp](mailto:info@tokitrading.co.jp)

トキトレーディング株式会社

〒669-1342 兵庫県三田市四ツ辻710  
[www.tokitrading.co.jp](http://www.tokitrading.co.jp)

