


0703 エンドブッシュ



UNIT : mm

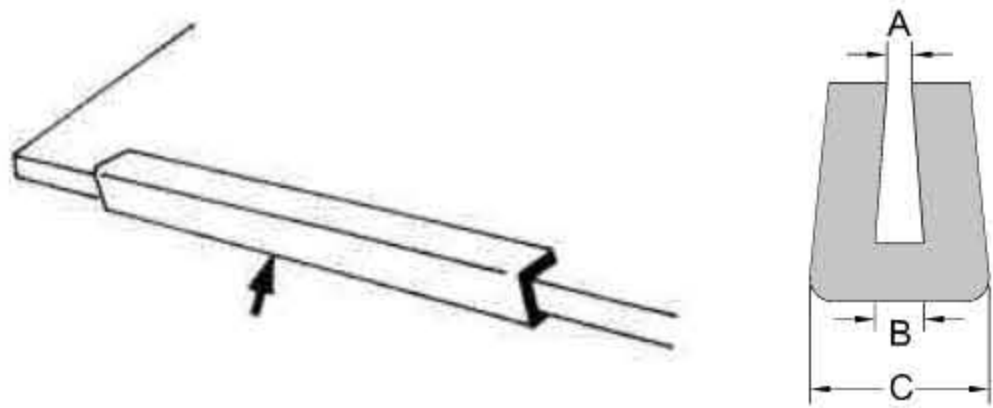

型番	A	B	C	適用板厚	入数
ED-010	0.5	1.0	3.3	under 1.0	10 M
ED-012	0.6	1.2	3.4	1.0~1.2	
ED-016	0.9	1.6	4.6	1.2~1.6	
ED-020	1.1	2.0	4.5	1.6~2.0	
ED-024	1.2	2.4	5.07	2.0~2.4	
ED-032	1.5	3.2	5.8	2.4~3.2	
ED-055	4.5	5.5	7.9	4.5~5.5	



- 材質：軟質ポリエチレン (PE)
- 標準色：ホワイト
- 特長：パネル、シャーシのエッジ部分を完全に保護します。

0705 電線保持ブッシュ



- 材質：ナイロン66 UL規格 (94V-2 No.E97527), 米軍規格 (MIL-S-23190D), MILL規格 (MS-3367)
- 標準色：ブラック
- 特長：各種家電製品、OA機器などの電線を固定、保護します。

取付方法

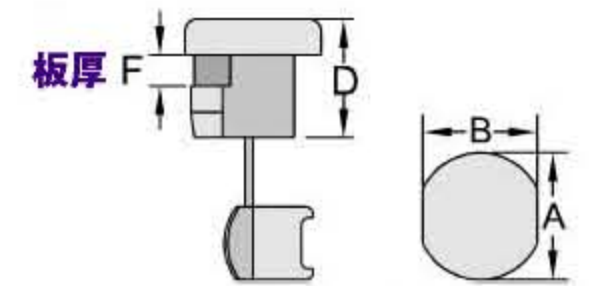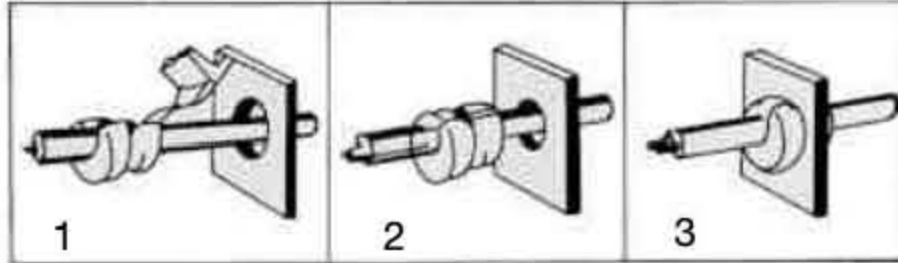

取付穴径
UNIT : mm

型番	タイプ	適用電線		取付穴径		パーツ長さ D	適用板厚 F	入数	
		UL 配線	サイズ	A	B				
SR-F21	フラット	SPT-1 #18	2.3X4.5 / 2.8X5.3	9.5	8.7	10.3	0.5-1.6	100 pcs	
SR-F23		SPT-1 #18	2.3X4.5 / 2.8X5.3	9.5	8.7	10.3	1.8-3.2		
SR-F31		SPT-1 #18	3.0X5.6	11.2	9.9	10.3	1.0-1.6		
SR-F32		SPT-1 #18	3.0X5.6	11.0	9.9	10.3	1.9-2.5		
SR-F41		SPT-2 #18	3.0X7.1 / 3.8X7.6	12.7	11.8	10.3	0.5-1.6		
SR-F42		SPT-2 #18	3.0X7.1 / 3.8X7.6	12.7	11.8	10.3	1.8-2.5		
SR-F51		SPT-3 #18	5X10.4	14.3	12.9	15.2	0.5-1.6		
SR-F53		SPT-3 #18	5X10.4	14.3	12.9	15.2	1.8-3.5		
SR-F83				6X15.2	21.6	21.3	20.4		2.0-3.4
SR-5R1		ラウンド	SVI,SVT 3C #18	Ø6.2~Ø7.4	12.8	11.5	11.0		0.5-1.6
SR-5R2	SVI,SVT 3C #18		Ø6.2~Ø7.4	13.0	11.5	11.0	1.8-2.5		
SR-6W2	SJT 3C #18		Ø7.6	12.8	11.8	11.0	1.8-2.3		
SR-6P1	SJT 3C #18		Ø7.4~Ø8.2	15.9	14.0	14.8	0.5-1.6		
SR-6P3	SJT 3C #18		Ø7.4~Ø8.2	15.9	14.0	14.8	1.9-3.2		
SR-6R1	SJ,SJT,3C #16		Ø8.2~Ø9.2	15.9	14.0	14.8	0.5-1.6		
SR-6R3	SJ,SJT,3C #16		Ø8.2~Ø9.2	15.9	14.0	14.8	1.9-3.2		
SR-7R1	SJT,3C #14		Ø9.2~Ø10.5 / Ø11	19.9	17.0	19.0	0.5-1.6		
SR-7R3	SJT,3C #14		Ø9.2~Ø10.5 / Ø11	19.7	17.0	19.0	1.9-3.2		
SR-8R3	SJT,3C #12		Ø12~Ø15.2	21.6	21.3	20.6	1.9-3.2		
SR-9R1	# 18 20-30pcs	Ø11~Ø15	15.0	19.0	17.5	0.5-1.6			
SR-9R7	SJT,3C # 10	Ø15.2~Ø16.3 / Ø17.5	28.0/30.2	25.5	25.2	1.0-3.2			